



	0
Summa F Series	0
The Summa flatbed cutters are developed to grow Enjoy the countless possibilities all in one machine	
Base Unit	0
Multiple flatbed sizes are available to fulfill your cu	ıtting needs.
Summa F1612	09
Summa F1432	10
Summa F1832	11
Summa F3220	12
Summa F3232	13
Modules & Tools	14
The extensive range of modules and tools allow variety of applications. Tangential Module	you to finish a wid
Drag Module	21
Rotary Module	22
Standard Router Module	23
HF Router Module	24
Tool Application Overview	25
Media Handling & Workflows	21
Rely on efficiency with media handling and optimis	sed workflows.
Summa GoProduce Software	32
	the Summa F Series
Powerful, in-house developed software tailored to	the Summar Series.
	3



With the F Series, Summa offers a future-proof cutting product line based on over 30 years of expertise in building the world's very best cutting plotters. These advanced engineered flatbed cutting tables are designed to cut various sheet and rigid materials as well as roll stock. A multifunctional cutting head, a great range of modules and tools and many media handling options contribute to the series' versatility and flexibility.

Over the years, the Summa F Series opened many doors for our customers, enabling them to expand business into new markets such as packaging design, Point Of Sale and textile applications.



Applications

The F Series is designed to process a wide variety of materials for an even greater diversity of applications. Achieve a perfect cut with the Summa flatbed cutters to realise flawlessly finished end products.

S Sign & Display

The world of Sign and Display is broad and versatile. The flatbed cutting solutions can optimise your print & cut workflow, meet your customers' deadlines and deliver perfectly finished end-products.

- · POS displays
- Soft signage
- Stickers
- · Mock-up designs
- · Traffic Signs
- Billboards



When processing textiles, a most accurate cut is of key importance. With a great diversity in production processes, textile cutting is still often done manually. The flatbed cutters enable businesses to optimise their workflow, make it more efficient and significantly reduce materal waste.

- · Backlit displays
- · Flags & banners
- Interior decoration
- Sportswear
- Fashion

Packaging

In today's imaging dominated world the role of packaging is more relevant than ever. Packaging must, therefore, stand out and attract the eye of the beholder. At the same time, it is important packaging is strong enough to withstand transportation handling.

- · Prototype packaging
- Customised packaging
- · Short-run packaging
- · Event-based packaging
- · Creative packaging

















One Machine, Countless Possiblities

It starts with the base unit with a choice of no less than 5 models. Then you can carefully choose the modules and tools you need for your applications and consider the various media handling add-ons. Additionally, the included GoProduce software enables you to operate the cutter with ease and set up a productive workflow.




Build your workhorse

The Summa F Series include a number of very powerful elements to combine into your ideal cutting solution. What's more, the available tools are retrofittable and add-ons and media handling options can be acquired at any stage. This is exactly what makes an F Series flatbed cutter the ideal workhorse to grow with your business.

01 | Strong Base Unit

The base unit is the foundation of a good performing cutting workflow. It has to be strong and the right size. With Summa you can choose from no less than 5 models. Also, the integrated safety system is part of the flatbed's strong foundations contributing to a safe working environment.

- Flatbeds available in five sizes
- Easy maintenance of the system
- Complies with worldwide health and safety requirements
- · Highly advanced technology
- Cutting table remains easy accessible
- · Optimised footprint



Working area comparison

02 | Extensive Range of Modules & Tools

The F Series perfectly grows in line with your business goals and aspirations. Open up to new markets and applications with the modules and tools of your choice. The multifunctional head is able to hold up to three modules at once, with the tools you prefer.

- Drag knife module
- Tangential module
- High Torque Rotary module
- Standard Router module
- · High Frequency Router module
- · Extensive choice of tools



Tangential Module

03 | Efficient Media Handling & Workflows

The flatbed cutters are equipped with convenient media handling features and multiple add-ons to choose from Further optimise your cutting workflow thanks to the operator zone, barcode workflow and F-Performance.

- Conveyor belt system
- Roll support system
- Vacuum table
- Media advance clamps
- Operator zone
- Poster trim
- Barcode workflow
- F-Performance
- · And many more

- Exclusive F1612 Add-ons:
- Conveyor extension
- Basket
- Roll-up system
- · Extension Tables

04 | Powerful Software

Summa GoProduce is a powerful and in-house developed software. The cornerstone of the good functioning of your F Series. Tailor and use the software as you wish through targeted features and choose the level of advancement according to your specific cutting requirements

- Material manager
- · Custom configuration of action sets
- Barcode functionality (Pro Pack)



Summa GoProduce

A STRONG BASE TO BUILD UPON

High-quality cutting equipment relies on a strong base. It requires a cutting unit which can be enhanced with additional features, options and add-ons at any given time. This way, the cutter can grow together with your business goals and aspirations. That is what the F Series is all about. Providing a solid base to transform your F Series model into the versatile cutting solution that perfectly fits your business needs.

The F Series is your versatile business companion. A companion you can build upon.



SUMMA FI612

The F1612 is Summa's smallest F Series flatbed cutter, fitting effortlessly into many production area's. It represents the ideal cutting solution for sign makers who want to automate their cutting workflow or extend their cutting applications.

Key Benefits

- Small footprint
- Straightforward installation
- Media handling options
- Modular tooling system
- Integrated Safety System
- Future-proof

Ideal to cut:

- Cardboard material
- Roll stock
- (Technical) textile
- Synthetic material
- Foamboard
- Wood





Video: Scan the QR code to watch all F Series videos

Technical Specifications

Model	F1612
Dimensions	97 x 86 x 43 in.
Media Width	Up to 65 in.
Working Area	63 x 47 in.
Vacuum	1.3 kW (50Hz) / 1.75 kW (60Hz)
Vacuum Zones	Variable over width of machine
Requirements	Standard: 3 x 400V + N, 50Hz, max 20A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 20A
Standard Solution includes	F Series Flatbed System Conveyor System with Pneumatic Media Clamps and Roll Support Safety Pack Camera System Axis Control Software Drag Module ADC Left & Right GoProduce software Speed: up to 1000 mm/sec Acceleration: Up to 1G

Modules & Tools

All F Series models can be equipped and retrofitted with various modules and tools. This makes the F Series ideal to grow with your business and open up new markets at any given time.

- High Frequency Router
- High Torque Rotary module
- · Tangential module
- V-Cut tools, Creasing tools, Heavy-Duty Cutout tool, etc.

Media Handling & Workflows

The flatbed cutter is standard equipped with a range of convenient media handling features. For the F 1612 model special media handling options are available to further enhance the use of this compact flatbed.

Enjoy an automated workflow and ease-of-use:

- Twin Workflow
- Operator Zone
- Poster Trim
- Barcode Workflow

Media Handling Add-Ons

- · Conveyor extension
- · Roll-up system
- · Extension tables
- Basket

Applications











Scan the QR

code to watch

all F Series

videos

SUMMA FI432

The F1432 is the latest addition to the F Series flatbed cutters. It allows to process popular 137 cm/54" roll widths more efficiently and its working length gives sufficient margin to easily cut 3m/10ft jobs. For many businesses, this size is the ideal interim solution between the F1612 and F1832 models.

Key Benefits

- · Perfect interim size
- Modular tooling system
- Integrated Safety System
- Future-proof

Ideal to cut:

- Roll stock
- Lengthy materials
- Cardboard material
- (Technical) textile
- Synthetic material

Modules & Tools

All F Series models can be equipped and retrofitted with various modules and tools. This makes the F Series ideal to grow with your business and open up new markets at any given time.

- High Frequency Router
- High Torque Rotary module
- · Tangential module
- V-Cut tools, creasing tools, Heavy-Duty Cutout tool, etc.



Technical Specifications

Model	F1432
Dimensions	91 x 166 x 48 in.
Media Width	Up to 56 in.
Working Area	53 x 126 in.
Vacuum	2.2 kW (50Hz) / 2.55 kW (60Hz)
Vacuum Zones	6 zones (2 rows x 3 columns)
Requirements	Standard: 3 x 400V + N, 50Hz, max 30A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 20A
Standard Solution includes	F Series Flatbed System Conveyor System with Pneumatic Media Clamps and Roll Support Safety Pack Camera System Axis Control Software Drag Module ADC Left & Right GoProduce software Speed: up to 1000 mm/sec Acceleration: Up to 1G

Media Handling & Workflows

The flatbed cutter is standard equipped with a range of convenient media handling features. Enjoy an automated workflow and ease-of-use:

- Twin Workflow
- · Operator Zone
- Poster Trim

- · Barcode Workflow
- Tandem Mode

Applications













Scan the QR

code to watch

all F Series videos

SUMMA F1832

The F1832 F Series flatbed cutter is a perfect match for cutting popular materials, such as 150 cm wide rolls and 152 x 304 cm rigid board materials. Combined with the High Torque rotary tool, the F1832 is ready to conquer also the textile market with the ability to cut the popular textile size of 183 cm.

Key Benefits

- Processes popular board and roll material
- Modular tooling system
- Integrated Safety System
- Future-proof

Ideal to cut:

- Cardboard material
- Roll stock
- (Technical) textile
- Synthetic material
- Foamboard
- Wood

Modules & Tools

All F Series models can be equipped and retrofitted with various modules and tools. This makes the F Series ideal to grow with your business and open up new markets at any given time.

- High Frequency Router
- · High Torque Rotary module
- · Tangential module
- · V-Cut tools, creasing tools, Heavy-Duty Cutout tool, etc.

Applications



Technical Specifications

Model	F1832
Dimensions	110 x 166 x 48 in.
Media Width	Up to 75 in.
Working Area	72 x 126 in.
Vacuum	2 x 2.2 kW (50Hz) / 2 x 2.55 kW (60Hz)
Vacuum Zones	8 zones (2 rows x 4 columns)
Requirements	Standard: 3 x 400V + N, 50Hz, max 30A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 20A
Standard Solution includes	F Series Flatbed System Conveyor System with Pneumatic Media Clamps and Roll Support Safety Pack Camera System Axis Control Software Drag Module ADC Left & Right GoProduce software Speed: up to 1000 mm/sec Acceleration: Up to 1G

Media Handling & Workflows

The flatbed cutter is standard equipped with a range of convenient media handling features. Enjoy an automated workflow and ease-of-use:

- Twin Workflow
- Operator Zone
- Poster Trim

- · Barcode Workflow
- Tandem Mode

Media Handling Add-on Available:

· Heavy-Duty Roll Support







SUMMA F3220

The F3220 F Series flatbed cutter has a working width of 3.2 m. It is the ideal companion to process wide-format materials with utmost ease and accuracy. Thanks to the size users are able to obtain a print & cut workflow fitting seamlessly into each other, opening up to endless applications for the textile market in particular.

Key Benefits

- Matches 3.2 m wide textile printers
- Ideal for high-production environments
- HD RS for heavy roll material
- Modular tooling system
- Integrated Safety System
- Future-proof

Ideal to cut:

- Textile (flags, mesh, banners)
- 3 m x 2 m board material

Modules & Tools

All F Series models can be equipped and retrofitted with various modules and tools. This makes the F Series ideal to grow with your business and open up new markets at any given time.

- · High Frequency Router
- High Torque Rotary module
- · Tangential module
- V-Cut tools, creasing tools, Heavy-Duty Cutout tool, etc.





Video: Scan the QR code to watch all F Series videos

Technical Specifications

Model	F3220
Dimensions	166 x 123 x 48 in.
Media Width	Up to 131 in.
Working Area	128.7 x 82.6 in.
Vacuum	4 kW (50Hz) / 4.6 kW (60Hz)
Vacuum Zones	7 Zones (1 row x 7 columns)
Requirements	Standard: 3 x 400V + N, 50Hz, max 20A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 20A
Standard Solution includes	F Series Flatbed System Conveyor System with Pneumatic Media Clamps and Roll Support Safety Pack Camera System Axis Control Software Drag Module ADC Left & Right GoProduce software Speed: up to 1000 mm/sec Acceleration: Up to 1G

Media Handling & Workflows

The flatbed cutter is standard equipped with a range of convenient media handling features. Enjoy an automated workflow and ease-of-use:

- Twin Workflow
- Operator Zone

- · Poster Trim
- Barcode Workflow

Media Handling Add-On Available:

· Heavy-Duty Roll Support

Applications







Scan the QR

code to watch all F Series

videos

SUMMA F3232

The F3232 is Summa's largeformat F Series flatbed cutter, the ideal companion to process popular print sizes with utmost ease and accuracy. The large working area enables a print & cut workflow fitting seamlessly into each other, opening up to endless applications for sign&display and textile market.

Key Benefits

- · Matches 3.2 m wide textile printers
- Ideal for high-production environments
- HD RS for heavy roll material
- Modular tooling system
- Integrated Safety System
- Future-proof

Ideal to cut:

- Textile (flags, mesh, banners)
- 3 m x 2 m board material

Modules & Tools

All F Series models can be equipped and retrofitted with various modules and tools. This makes the F Series ideal to grow with your business and open up new markets at any given time.

- · High Frequency Router
- High Torque Rotary module
- · Tangential module
- V-Cut tools, creasing tools, Heavy-Duty Cutout tool, etc.

Applications



Technical Specifications

Model	F3232
Dimensions	166 x 166 x 48 in.
Media Width	Up to 131 in.
Working Area	128.7 x 126 in.
Vacuum	2 x 2.2 kW (50Hz) / 2 x 2.55 kW (60Hz)
Vacuum Zones	14 Zones (2 rows x 7 columns)
Requirements	Standard: 3 x 400V + N, 50Hz, max 20A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 20A
Standard Solution includes	F Series Flatbed System Conveyor System with Pneumatic Media Clamps and Roll Support Safety Pack Camera System Axis Control Software Drag Module ADC Right GoProduce software Speed: up to 1000 mm/sec Acceleration: Up to 1G

Media Handling & Workflows

The flatbed cutter is standard equipped with a range of convenient media handling features. Enjoy an automated workflow and ease-of-use:

- Twin Workflow
- Operator Zone
- Tandem Mode

- Poster Trim
- · Barcode Workflow

Media Handling Add-On Available:

· Heavy-Duty Roll Support







MODULES & TOOLS

The F Series models are equipped with a **multi-functional cutting head** that is able to hold up to three cutting modules at once. The system is therefore able to efficiently process cutting jobs including multiple cutting techniques. Or to quickly switch between jobs in which different materials are used. The LED pointer in the central unit and integrated camera system enable fast and accurate mark recognition.



Extensive range of Modules & Tools

Summa offers an extensive range of modules and tools to choose from. Choose what cutting modules you need based on the products you produce or will produce in the future. Start with the basics or discover the more advanced options with the Tangential cutting module.

Tangential Module for:

- · Adhesive vinyl
- Window film
- Magnetic material
- Reflective sheeting
- Foamboard with paper
- · Adhesive PVC banner vinyl
- Cardboard
- Polypropelene
- Polycarbonate
- Sandblast material

Router Module for:

- Corrugated PP board
- Expanded PVC board
- Polycarbonate
- ACP/ACM

- MDF
- · Foamcore with HIPS liner
- Plexi

Rotary Module for:

- Uncoated woven polyester
- Coated woven polyester
- · Packaging foam
- Synthetic textiles
- · Technical textiles

Drag Module for:

- Paper
- Adhesive vinyl

· Adhesive PVC Banner Vinyl

Knives, Blades & Bits

Each of the above modules can house different tools, blades and bits. Choose the tool you need to cut your specific material and obtain the best cutting quality. All tools include a barcode ID, ensuring automatic recognition and parameter pre-sets.

You can extend your tool gamut whenever you see fit as your company grows.

Addiesive Fve Baillet VIIIyi



Drag Module

Router Module

Automated Depth Control / ADC

The Automated Depth Control (ADC) simplifies tool, knife or bit changes significantly. The ADC measures the tip of the knife or bit accurately and sets the down position of the tool to the table's level, thus guaranteeing a flawless cut.

Benefits

- · Easy tool change
- · Automatic depth measuring
- · Flawless cutting
- Less operator intervention
- · Saving valuable time

Video:

www.Summa.com/video/ADC





TANGENTIAL MODULE

The powerful Tangential Module offers a vertical force of 10 kg and corresponds to a wide range of matching tools enabling users to process an abundance of applications. Each of the many and varied tools has a barcode ID, which ensures automatic recognition and parameter settings.

Thanks to the multi-functional head on the F Series, users are able to install up to three modules. This way, multiple jobs with different cutting techniques can be assigned to a single machine, such as creasing and cutting, without the need to remove modules.



The wide range of tools is yours to choose from



Kiss-Cut Tool

· Clean cuts for easy weeding

Single Edge Cutout Tool

 Cuts materials up to 6 mm thick

Double Edge Cutout Tool

• Ideal to cut rigid material



Heavy-Duty Cutout Tool

 Cuts material up to 15 mm thick

Creasing Tools

· Clean creases without tearing

V-Cut Tools

· Precise angle adjustments



Electronic Oscillating Tool

• High processing speeds

Pneumatic Oscillating Tool

High-performance cutting tool

Pneumatic Oscillating Tool-L

· Thick and soft materials

Kiss-Cut Tool



With mechanically-controlled knife pressure, this tool is specifically designed for kiss-cutting material down to its liner up to 1.2 mm thick. This tool also includes an adjustable nose piece for precise depth control.

Strongest features

- · Precise depth control
- · Clean cuts for easy weeding
- · Cuts a wide variety of vinyl and film

Ideal for cutting:

- Paper < 200g
- · Adhesive vinyl
- · Sandblast material
- · Window film
- Magnetic material
- · Adhesive PVC Banner material

Blades

390-534 - Tangential Knife 36° Max cutting thickness - 0.25 mm

390-550 - Tangential Knife 60° Max cutting thickness - 1.2 mm



390-560 - Tangential Knife 45° wedge 40/25° Max cutting thickness - 1 mm









Single Edge Cutout Tool



The Single Edge Cutout Tool is designed for detailed cutting through materials up to 6 mm thick. A spring-loaded gliding disk allows cutting of very precise details and can be fixed at a set depth.

Strongest features

- · Precise cutting of details
- Cuts material up to 6 mm thick
- · Fixed depth setting

Blades



500-9801 - Single Edge Cutout Knife 65° Max cutting thickness (with gliding disk) - 6 mm Max cutting thickness (without gliding disk) - 6 mm

Ideal for cutting:

- Adhesive PVC banner vinyl
- Cardboard 300-500 gr
- · Adhesive vinyl
- Expanded PVC board <= 2 mm
- Polypropelene <= 1.2 mm
- Polycarbonate <= 0.6 mm
- · Adhesive PVC
- PVC banner
- · Magnetic material











Double Edge Cutout Tool



The Double Edge Cutout Tool ensures minimal wear when cutting through rigid material up to 5 mm thick. Here also, a spring-loaded gliding disk allows cutting of very precise details and can be fixed at a set depth.

Strongest features

- · Precise cutting of details
- · Cuts at both knife sides
- · Minimal knife wear
- · Ideal to cut rigid material

Ideal for cutting:

- Paper < 200 gr
- · Cardboard 300-500 gr
- Adhesive vinyl
- · Adhesive PVC
- PVC Banner
- · Reflective sheeting
- Expanded PVC board <= 1.2 mm
- Polypropelene <= 1.2 mm
- Polycarbonate <= 0.6 mm
- Magnetic material

Blades



500-9802 - Double Edge Cutout Knife 50°

Max cutting thickness (with gliding disk) - 3 mm Max cutting thickness (without gliding disk) - 3 mm



500-9803 - Double Edge Cutout Knife 60°

Max cutting thickness (with gliding disk) - 5 mm Max cutting thickness (without gliding disk) - 5 mm



500-9804 - Double Edge Cutout Knife 50° Burr-Free

Max cutting thickness (with gliding disk) - 3 mm Max cutting thickness (without gliding disk) - 3 mm










Heavy-Duty Cutout Tool





Strongest features

· Ideal to cut very thick material

Ideal for cutting:

- · Cardboard 300-500 gr
- · Adhesive vinyl
- Adhesive PVC
- PVC Banner
- Corrugated PP board <= 5 mm
- Expanded PVC board <= 1.2 mm
- Polypropelene <= 1.2 mm
- Polycarbonate <= 0.6 mm
- Foamcore with paper liner <= 5 mm
- · Varnish blankets

Blades



500-9807 - Heavy-Duty Cutout Knife 45° - 90° Max cutting thickness - 15 mm











Creasing Tools



Several creasing wheels, designed in different depths and radius sizes, are available for creasing and scoring paper, cartons, polypropylene and PVC material.

Strongest features

- · Clean creases without tearing
- · Directional pressure adjustments

Ideal for cutting:

- Corrugated B-C-A-EE-BC flute (3 - 6 mm)
- Corrugated C Flute (4 mm)
- Corrugated E Flute (1.5 mm)
- Paper < 200gr
- Cardboard 300 500 gr m2
- Polypropelene sheets= 1.2 mm
- Corrugated B-C-A-EE-BC flute (3-6mm)

Line up creasing tools



500-9325 | Creasing Tool D25 R3 W8 500-9326 | Creasing Tool D25 R1.5 W8 500-9327 | Creasing Tool D25 R0.75 W1.5 500-9328 | Creasing Tool D15 R0.35 W0.7 - 2pt 500-9329 | Creasing Tool D15 R0.17 W0.35 - 1pt 500-9324 | Creasing Tool D50 R1.5









V-Cut Tools



The V-Cut Tools are available in 5 angles and are designed to cut a V-shaped groove in rigid sandwich and foam composite boards up to 27 mm thick, depending on the material's density.

Strongest features

- · Precise angle adjustment
- · Very fast blade changes

Ideal for cutting:

- · Honeycomb board
- · Foamcore with paper liner

Blades



500-9826 - V-Cut Hard Metal Max cutting thickness 18-27 mm

Line up V-Cut tools











Electronic Oscillating Tool | EOT





Ideal for cutting soft and medium density materials such as corrugated board and foam up to 18 mm thick. The Electronic Oscillating Tool is driven by an electric motor, producing up to 12,000 rpm and moves a knife up and down over a stroke of 1 mm.

Strongest features

- · Powerful cutting tool
- · High processing speeds
- · Low maintenance

Ideal for cutting:

- Corrugated B-C-E Flute (1.5-4 mm)
- Foamcore with paper liner
 = 10 mm
- Foamcore with paper liner
- Honeycomb board < 10 mm
- Gasket

500-9815 -EOT L33 Knife 45° - 85°

Max cutting thickness (with gliding disk) - 13 mm Max cutting thickness (without gliding disk) - 19 mm

500-9814 -EOT L38 Knife 45° - 86°

Max cutting thickness (with gliding disk) - 18 mm Max cutting thickness (without gliding disk) - 24 mm

Blades

500-9800 - EOT L25 Knife 65°

Max cutting thickness (with gliding disk) - 5 mm Max cutting thickness (without gliding disk) - 5 mm

500-9810 - EOT L25 Knife 65° - 80°

Max cutting thickness (with gliding disk) - 5 mm Max cutting thickness (without gliding disk) - 11 mm

500-9811 - EOT L25 Knife 65° - 85°

Max cutting thickness (with gliding disk) - 5 mm

Max cutting thickness (without gliding disk) - 11 mm



500-9813 - EOT L25 Knife 0° - 75°

Max cutting thickness (with gliding disk) - 5 mm
Max cutting thickness (without gliding disk) - 6 mm



500-9812 - EOT L28 Knife 65° - 85°


Max cutting thickness (with gliding disk) - 8 mm Max cutting thickness (without gliding disk) - 14 mm





Pneumatic Oscillating Tool | POT | POT-L



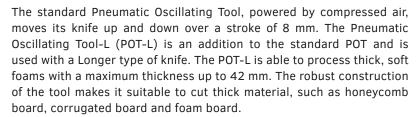

Strongest features

- · High-performance cutting tool
- · High processing speeds
- Availability of longer knife

Ideal for cutting:

- Triple walled cardboard
- · Double walled cardboard
- Packaging Foam
- Honeycomb board >= 10 mm
- Foamcore with paper liner> 5 mm
- Rubber

Blades

500-9830 - POT Knife Flat Point L20 T0.63 Max cutting thickness - 18 mm



500-9831 - POT Knife Flat Point L27 T0.63



500-9832 - POT Knife Flat Point L20 T1.5
Max cutting thickness - 18 mm



500-9833 - POT Knife Serrated L27 T1.0 Max cutting thickness - 25 mm

FOO ORDA POT Krife Pair

*POT-L Tool Only

500-9834 - POT Knife Point L20 T1.0* Max cutting thickness - 16 mm *Extra protective mat recommended







DRAG MODULE

The Drag Module enables users to make notations with pens or to kiss-cut materials with a pressure of 600 grams of downforce, using a drag knife.

Multiple Drag Modules can be mounted into the multi-functional head of the flatbed to allow both kiss-cutting and drawing without the need to change modules.

The Drag Module is standard included with all F Series models. The perfect module to start with!

Ideal for cutting:

- Paper < 200g
- · Adhesive vinyl
- · Sandblast material
- Window film



Drag Knife Tool

With 600 g of force, this tool is ideal for kiss-cutting a wide range of adhesive vinyls.

Strongest features

- Fast and precise
- · Pinpoint kiss-cutting for easy weeding


Blades



391-231 - Drag Knife - 60° Max cutting thickness - 0.6 mm



391-358 - Drag Knife - 55° Max cutting thickness - 0.8 mm





Pen Tool & Universal Pen Holder Tool

The pen tool allows precise drawing on various materials, using either our own brand of fiber tip pens or a variety of third-party pencils and pens in a multitude of sizes and diameters.

Strongest features

· Precise drawing on various material types

Pens



MP06BK Fibre Tip Pen - Black

395-430/395-431 Roller Ball Pen Black / Blue

Pen Holders



Universal Pen Holder / Black accepts pen/pencils from 6.5 mm to 10 mm in diameter

Universal Pen Holder / Copper accepts pen/pencils from 9.5 mm to 11 mm in diameter





ROTARY MODULE

The High Torque Rotary Module is driven by an electronic motor and is capable of handling all kinds of textiles. Thanks to extra rotational power, the HT RM is also able to cut tougher and thicker substrates, such as banner material.

Ideal for cutting:

- Uncoated woven polyester
- Coated woven polyester
- Laminated fabrics
- Canvas
- Fleece
- Felt
- Packaging foam
- Synthetic textiles
- Technical textiles



Take the production of your textile applications to the next level with the High Torque Rotary Module.

In general, the vacuum table of the F Series flatbed cutter has less grip on textiles. However, with the High Torque Rotary Module the material will stay in place thanks to the minimal horizontal force it produces. Consequently, also extremely porous material can easily be processed with the HT RM.

Video: www.summa.com/video/rotary-module

Strongest features

- Rotary blade reduces drag on material
- · Motor-driven blade for reliable cutting
- Clean, precise cuts of all textile types









Decagonal Knives



500 - 9860 Decagonal Knife D25

Max cutting thickness - 1.5 mm



500 - 986 Decagonal Knife D28

Max cutting thickness
- 3 mm



500 - 9862 Decagonal Knife D32 Max cutting thickness

- 5 mm

STANDARD ROUTER MODULE

The Standard Routing Module has a 1kW motor, capable of handling most solid boards in the graphic and sign industry. Hard foam PVC, acrylic and aluminium covered foam boards as well as other materials, such as wood and MDF can be processed.

Ideal for cutting:

- Expanded PVC board
- Corrugated PP Board
- Polycarbonate
- MDF
- Plexi
- ACP/ACM
- Foamcore with PVC liner
- · Foamcore with HIPS liner



If you aspire to grow your business, you have to be ready to take on any job. Whether this means cutting 1.000 magnetic stickers, promotional board material for an upcoming sale, signage cut out of plexi or MDF, you need a system that is cut out for any job, each time again. With the standard router module, you will extend your cutting solutions considerably.



Strongest features

- · Allows routing, engraving & polishing
- · Processes a wide range of substrates
- Efficient dust extraction for clean operation (optional vacuum cleaning kit)
- Availability of various bits



Routing Bits





For the complete overview of bits go to:


www.Summa.com/pdf/summa-router-bits-overview

HF ROUTER MODULE

The HF Routing Module is equipped with a high-frequency spindle and a higher power output, which allow higher processing speeds. The utmost balanced, high-frequency spindle provides for a much smoother finishing of rigid substrates. The bit is pneumatically controlled and can be replaced manually in a fast and simple way.

Ideal for cutting:

- Expanded PVC board
- · Corrugated PP Board
- Polycarbonate
- MDF
- Plywood
- · Natural Hardwood
- Plexi
- ACP/ACM
- Foamcore with PVC liner
- · Foamcore with HIPS liner

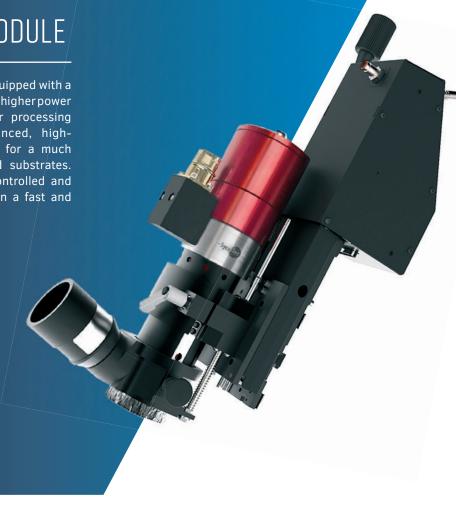

Especially for high-production environments, the High Frequency Router module will proof its worth. So, if you process tough, rigid material types on a regular basis and you want the job to be done rapidly and efficiently, the HF router is your first choice tool. Achieve exceptional performance and productivity with the high-frequency spindle and deliver top-quality products with impeccable edge finishing.



Video: www.Summa.com/video/HF-router-module

Strongest features

- Maximises productivity
- Higher processing speeds
- Robust, reliable construction
- Impeccable edge finishing
- Efficient dust extraction for clean operation (optional vacuum cleaning kit)
- Availability of various bits



Routing Bits





For the complete overview of bits go to:

www.Summa.com/pdf/summa-router-bits-overview

Tools I Application Overview

Natural Hardwood

Gasket

Textiles (Coated-Uncoated) Insulation foam

* min. thickness 20 mm

INDUSTRIAL MATERIALS

Laminated Fabrics Coated woven polyester Uncoated woven polyester WOOD

ACP/ACM

Foamcore with HIPS liner

Foamcore with PVC liner

Foamcore with paper liner COMPOSITES

PET < 1.2 mm PET < 2 mm

Expanded PVC board > 2 mm

Corrugated PP board <= 5 mm SYNTHETIC MATERIALS Reflective sheeting

Sandblast material Mesh Banner Adhesive PVC banner vinyl

ROLL MATERIALS Honeycomb board >= 10 mm Honeycomb board < 10 mm Corrugated BC flute (7 mm) Corrugated C flute (4 mm) Corrugated B flute (3 mm) Cardboard 300-500 gsm

Magnetic Window film

Polycarbonate <= 0.6 mm Polypropylene sheets <= 1.2 mm Expanded PVC board <= 2 mm Corrugated PP board > 5 mm

Polycarbonate > 1 mm



CARDBOAR

Paper < 200 gsm

HF ROUTER MODU

ARD MATERIALS		ended	ULE 25	
	Dra	g Mo	odule	
			Tool + 4 knife	
			: Tool+ O knife	
	Kiss 390	Cut	: Tool + O knife	
	500	gle E out 7 0-93 oble I	Tool 12 Edge	
	Hea Cut	001 0-93 1vy D out 7	1 uty Tool	
	E01	Too 0-93	ol 20	
	POT 500	Too 0-93	50	
		-L To		
		ut To)-93	ool 0° 40	Tangentia
		ut To)-934	ool 15° 41	al Module
		ut To	ool 22.5° 42	
		ut To	ool 30° 43	
	" ~	ut To	ool 45° 44	
	D25	asin R3)-93		
	D25	R1.		
	D25	asing RO. 0-932	g Tool 75 W1.5 27	
	D15 2pt	500. 500	g Tool 35 W0.7 -9328	
	D15	asını 5 RO. .35 1)-93	l pt	
	D50	asin) R1.)-93:		
		ndar ıting	d Module	
	HF	Rout	ing Modu	ıle

																П			500-9344
																			Creasing Tool D25 R3 W8 500-9325
																			Creasing Tool D25 R1.5 W8 500-9326
																			Creasing Tool D25 R0.75 W1.5 500-9327
																			Creasing Tool D15 R0.35 W0.7 2pt 500-9328
																			Creasing Tool D15 R0.17 W0.35 1pt 500-9329
																			Creasing Tool D50 R1.5 500-9324
																			Standard Routing Module
																			HF Routing Module
																			High Torque Rotary Module



Enhanced productivity with efficient media handling

The F Series flatbed cutters are equipped with a range of media handling features that are standard included with each model. Also a range of model-specific media handling add-ons is available to further enhance operator convenience and productivity. You can find a detailed overview of the specific media handling possibilities per model in the product sheets.

1. Conveyor System

The Conveyor System allows you to cut, crease and annotate large lengths of (flexible) material to large production runs. The conveyor automatically transports cut parts away from the cutting area. This allows the production of jobs that are longer than the actual working area of the flatbed cutter.

2. Media Advance Clamps

Pneumatically-driven media advance clamps fix the material while pulling it forward to work continuously in panels or while processing multiple jobs.


3. Roll Support System

In combination with the Conveyor System and the Media Advanced Clamps, the Roll Support System is ideal for processing roll material on all the Summa F Series models.

4. Vacuum Table

The vacuum table generates hold-down force to keep the material in place during the cutting process while the selector adjusts the vacuum automatically to match the working area.

The vacuum table can be set up with zones that can be turned on or off in case you want to process smaller jobs.

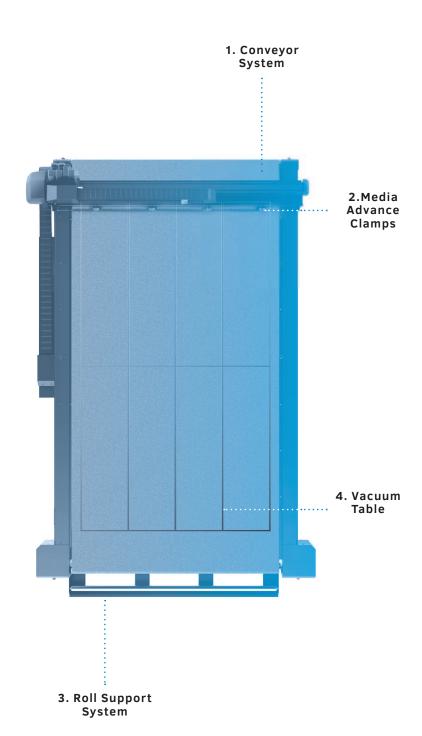

A workflow to anyone's need

The F Series flatbed cutters allow to streamline the cutting workflow to your specific business needs. The different available workflows contribute to the flatbed's ease-of-use, minimise operator intervention and increase yield considerably. The below workflows are standard included with all F Series models, unless otherwise specified.



Operator Zone

With this feature the F Series' working area can be divided into two separate zones, a cut only zone and an Operator Zone. The included Conveyor system automatically feeds all cut material forward to the Operator zone. The cutting head doesn't move any further than the cut only zone, so the operator has access to the cut pieces safely at the front of the machine.

Video: www.Summa.com/video/operator-zone



Poster Trim

This feature enables a fast cutting of posters without the need of importing any cutting data. The F Series built-in camera system automatically detects the edges of black printed frames and starts to cut immediately, without operator intervention. The Poster Trim functionality is the ideal way to make sure your posters are cut rapidly and precisely with a minimum of manual actions.

Video: www.Summa.com/video/poster-trim



Tandem Mode | For F1432, F1832, F3232

By using the front zones and rear zones alternately, this feature leads to significant production increase. With the Tandem Mode, the active working area on the flatbed can be divided into front and back processing areas, enabling the user to load and unload material on one end of the table while cutting material on the other end of the table. This will avoid idle periods during cutting, which will add significant value to the overall workflow.

Video: www.Summa.com/video/tandem-mode



Twin Workflow

To maximise productivity and flexibility in your finishing workflow, you can use the Twin Workflow. The Twin workflow combines the strength of an S Class 2 OPOS CAM roll cutter with an F Series flatbed cutter, meaning you can kiss-cut on the OPOS CAM cutter and cut through on the F Series flatbed cutter.

The Twin Workflow has been developed for users that want to optimise the use of their equipment in a most efficient way. By using one of these workflows, productivity and performance will be brought to a higher level. The smooth integration of the cutters into existing workflows will further contribute to the customer's Productivity, Performance and Profitability!

Video: www.Summa.com/video/twin





Certain RIP (Raster Image Processing) software offer the possibility to print a barcode with OPOS marks. This barcode can be used to identify the job and to automatically obtain the necessary cut data from the computer. Summa offers two possible ways to scan in a job.

With the Summa F Series built-in camera

With this F Series' optional barcode setup, scanning the job happens automatically and continuously by the built-in camera. The operator doesn't need to localise the job himself anymore. The job will be opened automatically in GoProduce to be processed immediately.

The greatest asset of Summa's revolutionary camera system is that the camera will search for the next job without operator intervention.

With a hand scanner

Another means to offer flexibility to the operator's workflow is scanning the job manually with a hand scanner.

This way the operator can easily switch between jobs and materials. Multiple, different jobs can be processed back to back with ease.


This feature is embedded in the GoProduce software. However, the hand scanner itself is not included and needs to be purchased separately.

Activation

An extra activation key for the built-in camera with barcode option is required. You can obtain the activation key via www. Summa.com.

Video:

www.Summa.com/video/barcode

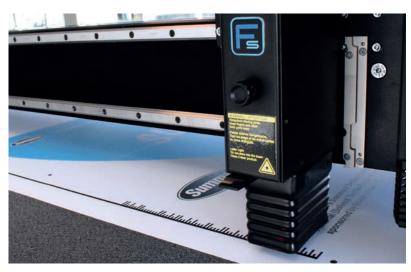

Barcode Workflow with Summa's built-in camera



Barcode Workflow with hand scanner

F-Performance

The F-Performance mode ensures an increase of up to 40% of the F Series' performance. Advantages include faster up, down and turning movements of the cutting head, which will be most remarkable when using the Kiss-cut tool. Also, feeding material will happen significantly faster. The job will be finished practically twice as fast without compromising an inch on quality.

The F-Performance mode is available as free unlock on new machines via www.Summa.com/f-performance and as payable unlock on older F Series models, built before 2018.

Video: www.Summa.com/video/fp

"The usage of the F-Performance mode on the F1612 made a huge difference to our production speed. The small gains on feed speed and tool movement really add up to give us around 30% additional productivity on this particular project."

/ Freestyle Design about F-Performance



Workflow Compatibility

The Workflow Compatibility of the Summa GoProduce software ensures a seamless fit into existing workflows. The software offers flexible data import and is supported by the following RIP manufacturers:

RIP manufacturers:

Agfa Asanti
Cadlink RIP
Caldera RIP
ColorGATE RIP
ErgoSoft PosterPrint
ErgoSoft TexPrint
GMG Production Suite
ONYX RIP
SAI Wasatch RIP


Packaging Software Compatibility:

Arden Picador

1. Prepare design

2. Print & setup

3. Finish



Testimonial | TrafficSupply

"WITH THE FIGI2 FLATBED CUTTER, THE JOB IS DONE IN AN INSTANT."

Company: TrafficSupply
Core business: Traffic signs
Challenge: Keep up with demand
Solution: Summa F1612

The Story | "A typical F1612 workflow starts with a simultaneous setup of the print and cut file. As soon as the printing and lamination part is finished, the roll with reflective foil is placed onto the roll-up system. Then advanced by the conveyor onto the F1612 flatbed cutter surface.

Subsequently, the cutter reads the barcode printed on the design and starts processing the correct file. By scanning the registration marks the cutter knows exactly how the roll is positioned onto the table – compensates if necessary – and starts to cut. Fast and efficiently."



"If we hadn't purchased the F1612, we would've surely needed to employ more staff. With the F1612, the job is now done in an instant. Precisely, rapidly and straightforwardly."

/ TrafficSupply about F1612



Media Handling Add-ons for F1612

Basket

The Basket is a handy accessory to reduce the media handling time, thus optimising your workflow. The F1612 can automatically process several feet of material while the basket is capturing the cut-out vinyl and/or waste material. Rely on an efficient cutting workflow and a clean work environment.



Extension Tables

The sturdy, foldable Extension Tables can be placed in front and at the back of the F1612. They are adjustable to set the correct height. This way, board material longer than the F1612 working area can still be processed. With the extension tables you can use the Continuous Sheet Feed feature, this enables the user to load and unload material while cutting. The feature helps to avoid idle periods during the processing of material and thus adds significant value to the overall workflow.



Video: www.Summa.com/video/continuous-sheet-feed


Roll-Up System

When kiss-cutting, the roll-up system winds the material back on a roll after it has been cut. This allows the F1612 to work unattended, while keeping the work area neat and clean. When cutting through, a workflow can be set up in combination with the basket or extension table. The roll-up takes care of the waste matrix while the operator collects the cutout material. The winded roll is also easily accessible for trolleys or other tools to handle heavy rolls.



Conveyor Extension

Thanks to the conveyor extension, the F1612 makes light work of cut designs, that are much larger than their actual cutting area. Once the first part of the job is completed, the conveyor feeds the cut material to the extended front where it can be removed easily and safely, while the machine is cutting the next part. This minimises downtime considerably. *Note: All existing F1612 units in the field can be upgraded with this option.*





Media Handling Add-on for F1832, F3220, F3232

Heavy-Duty Roll Support

The Heavy-Duty Roll Support can be used on our wide-format flatbed sizes to allow a straight and effortless throughput of heavy print rolls before cutting the material. Especially for the processing of heavy banner material, non-stretchable wide textile rolls and lightly stretchable materials, the HD RS will prove its worth. It will even allow the processing of rolls up to 200 kg with ease.

Video: www.Summa.com/video/heavy-duty-roll-support







Summa GoProduce™

The user-friendly GoProduce software is part of Summa's GoSuite platform. GoProduce is developed for the operator of the F Series, handling jobs in a straightforward and easy way. The modern interface with improved navigation enables users to find and operate functions as quickly and intuitively as possible.



- · Modern interface
- Improved navigation
- Quick and intuitive
- Standard included
- · Pro Pack available
- 30-day Trial available

Key Features (standard included)

Material Manager

The material database includes an extensive range of material types which settings can be adapted to your specific needs. Through methods, you only need to choose the material you want to process. Then, the material manager automatically chooses the correct tool and its settings for the cutting job.

Overcut Compensation

This GoProduce functionality avoids or minimises overcuts in the corners.

Sorting

The order in which objects are handled is important to minimise output time. GoProduce can determine the start and end of a vector and the order of processing. The aim here is to shorten the traverse path. Basic sorting is done by GoProduce itself.

Milling

With the interactive milling function, any change in tool diameter and rotation is performed immediately and shown on the working area. All milling paths are automatically created and displayed; the tool diameter is taken into account.

Camera Recognition

The recognition process and localisation of the registration marks can be tracked in the camera preview window. All kinds of compensations and marks, which occur in everyday practice, are manageable with GoProduce.

Back Side Cutting IMPROVED

Back side cutting is especially useful when cutting cardboard boxes in order not to damage the print and in order to ensure the print is located at the outside.

Video: www.summa.com/video/back-side-cutting

GoProduce ™ Pro Pack

The optional GoProduce Pro Pack offers you advanced features such as barcode functionality, hot folder support and import possibility of plot files. Similar to the standard GoProduce software, also the Pro Pack will be gradually expanded with new functionalities.


How to get started

Choose the functionalities you need and discover the software with a free 30-day trial via www.summa.com/goproduce.

Knowledge Base:

Frequently asked questions have been bundled and answered by Summa experts in a knowledge database. Gradually, we will be extending the database with more tutorials, service-related topics and useful tips&tricks. Go to: www.summa.com/faq

Also, various tutorials are created to support you in the installation and use of Summa GoProduce.







PLM Packlib: Summa's packaging library

The PLM Packlib* for Summa is a library of resizable standard packaging models. The most popular packaging standards FEFCO (corrugated cardboard) and ECMA (folding carton) are included. Also a few POS display designs and solid cardboards (furniture) designs are available.

Box/design dimensions and material thickness are parametric. So, within a few clicks the correct cutting and folding lines are generated. These lines can be exported to a layered Illustrator file, ready to put graphics on it. This 'Summa version' also has the option to generate an OXF file, immediately ready to be used by GoProduce.`

If you want to make use of the Summa PLM PackLib library, please contact TreeDim via support@treedim.com

*PLM Packlib is a program from TreeDim known by 'Picador' software.

Key features

- · Ideal entry into the packaging industry
- · Easy standard packaging designs







Go to www.summa.com/faq/how-to-use-the-packlib-library for more information

Axis Control™

Axis Control $^{\text{TM}}$ software gives you full control over Summa's cutting table. The optimised design of the touchscreen makes Axis Control the optimum interface for the machine operator.

With the optional wireless controller, the operator is free to move around the table while changing basic settings.

Key features

- Machine operating software
- · Easy calibration of tools
- Optimising vacuum zone



^{*}Summa Axis Control is standard included with every flatbed purchase

Product Registration

Summa recommends users to register their products online. Upon registration of your Summa products, you can activate several features such as the F-Performance, barcode, and so on. Also, in the registration form, you can choose to tick the box if you want to receive our monthly newsletter. This way, you can stay up to date with Summa's latest products and features that might complement your cutting equipment.

All Summa products can be registered through the Summa website: www.summa.com/support/product-registration

Inspiring Customer Stories

Customer stories capture an extensive range of end-user experiences. Experiences they gain by operating our Summa cutting equipment daily, week in week out, year in year out. These stories will help you in obtaining a better understanding of the many reasons why a Summa product might just be the gamechanger you were looking for to bring your cutting workflow to the highest possible level.

Customer stories go beyond product leaflets, brochures and other presentations. These real-life views and opinions from people in the field are the actual depiction of a product's benefits as shown in a true production area. So, go ahead and read our blog, which is filled with inspiring customer stories to create innovative and striking applications with our Summa equipment that fits your every cutting need!

Blog: www.Summa.com/blog

Testimonial | TrafficSupply

"THE SUMMA FIGI2 FLATBED FINISHING SYSTEM SIMPLY OFFERS THE PERFECT SOLUTION TO FINISH THE JOB"

Company: CD Design Glasfolie Core business: Window films Challenge: Accurate & fast cutting Solution: Summa F1612 & F1832 The Story | Before the arrival of their first Summa flatbed cutter everything was cut manually or with a Summa D160 roll cutter at CD Design. However, the window film market was growing constantly and the substrates were often too thick to cut with a roll cutter. The purchase of their first flatbed finishing system thus became indispensable very soon. Meanwhile, both an F1612 and an F1832 flatbed cutter are operational - one in each of CD Design's facilities.





us to automate our workflow and considerably increase productivity. Additionally, the flatbeds enabled our employees to work a lot more efficiently and finish significantly more jobs per day. Subsequently, our customer database has grown, so we can honestly say 'sky is the limit' thanks to these two wonderful Summa flatbeds."

/ CD Design Glasfolie about investing in a F1612 & F1832

TECHNICAL SPECIFICATIONS

Model	F1612	F1432	F1832
Dimensions	97 x 86 x 43 in.	91 x 166 x 48 in.	110 x 166 x 48 in.
Media Width	Up to 65 in.	Up to 56 in.	Up to 75 in.
Working Area	63 x 47 in.	53 x 126 in.	72 x 126 in.
Vacuum	1.3 kW (50Hz) / 1.75 kW (60Hz)	2.2 kW (50Hz) / 2.55 kW (60Hz)	2 x 2.2 kW (50Hz) / 2 x 2.55 kW (60Hz)
Vacuum Zones	Variable over width of machine	6 zones (2 rows x 3 columns)	8 zones (2 rows x 4 columns)
Requirements	Standard: 3 x 400V + N, 50Hz, max 20A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 20A	Standard: 3 x 400V + N, 50Hz, max 30A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 30A	Standard: 3 x 400V + N, 50Hz, max 30A Or: 3 x 208V + N, 60Hz, max 30A Or: 3 x 230V, 50Hz, max 30A
Model	F3220	F3232	All standard solutions incl.
Model Dimensions	F3220 166 x 123 x 48 in.	F3232 166 x 166 x 48 in.	All standard solutions incl.
			All standard solutions incl.
Dimensions	166 x 123 x 48 in.	166 x 166 x 48 in.	All standard solutions incl. F Series Flatbed System Conveyor System
Dimensions Media Width	166 x 123 x 48 in. Up to 131 in.	166 x 166 x 48 in. Up to 131 in.	F Series Flatbed System Conveyor System Pneumatic Media Clamps Roll Support
Dimensions Media Width Working Area	166 x 123 x 48 in. Up to 131 in. 128.7 x 82.6 in. 4.0 kW (50Hz) /	166 x 166 x 48 in. Up to 131 in. 128.7 x 126 in. 2 x 2.2 kW (50Hz) / 2	F Series Flatbed System Conveyor System Pneumatic Media Clamps



Orag Module	es: Consumables	ORDER CODES
391-332	Drag Knife Holder for 36° & 60°	
391-360	Standard Drag Knives - 36° (5x)	
391-231	Drag Knife - 60°	
MP06BK	Fibre Tip Pens - Black (4x)	
395-430	Roller Ball Pens - Black (5x)	
395-431	Roller Ball Pens - Blue (5x)	
395-434	Pen Holders	
Tangential M	odule	
390-534	Standard Tangential Knife - 36°(5x)	
390-550	Sandblast Tangential Knife - 60°	
390-551	Double Tip Tangential Knife - 36°	
390-560	Tangential Knife 45° Wedge 40/25°	
390-553	Knife Install Tool	
395-348	Nose Piece for 36°	
500-9801	Single Edge Cutout Knife - 65°	
500-9802	Double Edge Cutout Knife - 50°	
500-9803	Double Edge Cutout Knife - 60°	
500-9804	Double Edge Cutout Knife - 50°/ Burr- Free	
E00 0007		
500-9807 500-9825	Heavy-Duty Cutout Knife - 45° / 90° V-Cut Blade - 0.9 mm (5x)	
500-9826	V-Cut Blade - 0.9 fillif (5x)	
500-3303	Gliding Disk Single Sided Knife	
500-3315	Gliding Disk Double Sided Knife	
	scillating Tool / EOT	
500-3313	Knife Guide for EOT	
500-9800	EOT Knife L25 - 65°	
500-9810 500-9811	EOT Knife L25 - 65° - 80° EOT Knife L25 - 65° - 85°	
500-9812	EOT Knife L28 - 65° - 85°	
500-9813	EOT Knife L25 - 0° - 65°	
500-9814	EOT Knife L38 - 45° - 86°	
500-9815	EOT Knife L33 - 45° - 85°	
Pneumatic O	scillating Tool POT / POT-L	
500-9830	POT Knife Flat Point L20 T0.63 (3x)	
500-9831	POT Knife Flat Point L27 T0.63 (3x)	
500-9832	POT Knife Flat Point L20 T1.5 (3x)	
500-9833	POT Knife Serrated L27 T1.0 (3x)	
500-9834	POT Knife L20 T1.0 (3x)	
500-9835	POT-L Knife L50 T1.0 (3x)	
High Torque	Rotary Module	
500-9860	Decagonal Knife D25 (3x)	
500-9861 500-9862	Decagonal Knife D28 (3x) Decagonal Knife D32 (3x)	
500-9862	Decagonal Kille D32 (3X)	
	em	
Routing Syst		
500-9850	Routing Bits D3/3 L38/11 1FI UC (3x)	
500-9850 500-9852	Routing Bits D4/4 L50/12 1FI UC (3x)	
500-9850 500-9852 500-9854	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x)	
500-9850 500-9852 500-9854 500-9856	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x)	
500-9850 500-9852 500-9854 500-9856 500-9857	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x)	
500-9850 500-9852 500-9854 500-9856 500-9857 500-9858	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x)	
500-9850 500-9852 500-9854 500-9856 500-9857 500-9858 500-9859	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/14 / POLISHING (1x)	
500-9850 500-9852 500-9854 500-9856 500-9857 500-9858 500-9859 500-9863	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x)	
500-9850 500-9852 500-9854 500-9856 500-9857 500-9858 500-9859 500-9863	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLTSHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x)	
500-9850 500-9852 500-9854 500-9856 500-9857 500-9858 500-9859 500-9863	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLTSHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x)	
500-9852 500-9852 500-9854 500-9856 500-9857 500-9858 500-9859 500-9863 500-9864	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview	
500-9850 500-9852 500-9854 500-9856 500-9857 500-9858 500-9863 500-9864	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/14 / POLISHING (1x) Routing Bits D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress	
500-9852 500-9852 500-9854 500-9856 500-9857 500-9858 500-9863 500-9864	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview	
500-9852 500-9852 500-9854 500-9856 500-9857 500-9858 500-9863 500-9864	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress	
500-9852 500-9852 500-9854 500-9856 500-9858 500-9858 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress	
500-9850 500-9852 500-9854 500-9854 500-9857 500-9858 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244 500-9379	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 5 mm Collet for 1050 Kress 8 mm Collet for 1050 Kress	
500-9850 500-9852 500-9854 500-9854 500-9857 500-9858 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244 500-9379 Accessories	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 6 mm Collet for HF Router	
500-9852 500-9854 500-9854 500-9856 500-9857 500-9859 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244 500-9379	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for HF Router Vacuum Cleaner Bag for Hercules (5x)	
500-9850 500-9852 500-9854 500-9856 500-9858 500-9859 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244 500-9379 Accessories 500-9347 500-9348	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for HF Router Vacuum Cleaner Bag for Hercules (5x) Filter for Hercules	
500-9852 500-9852 500-9854 500-9856 500-9858 500-9858 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244 500-9379 Accessories 500-9347 500-9348 500-9349	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for HF Router Vacuum Cleaner Bag for Hercules (5x) Filter for Hercules Carbon Filter for Hercules	
500-9850 500-9852 500-9854 500-9856 500-9858 500-9859 500-9863 500-9864 500-0241 500-0242 500-0243 500-0244 500-9379 Accessories 500-9347 500-9348	Routing Bits D4/4 L50/12 1FI UC (3x) HF Routing Bits D6/3 L50/06 MP 1FI UC (3x) HF Routing Bits D6/4 L50/12 MP 1FI UC (3x) HF Routing Bits D6/6 L50/12 MP 1FI UC BAL (3x) HF Routing Bits D6/6 L58/22 MP 1FI UC BAL (3x) HF Routing Bit D6/6 L50/14 / POLISHING (1x) Routing Bits D6/10 L50 90° B 2FI (2x) Routing Bits D6/6 L50/22 2 FI UC/DC (2x) Complete bit overview of Summa: www.Summa.com/pdf/summa-router-bits-overview 3 mm Collet for 1050 Kress 4 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for 1050 Kress 6 mm Collet for HF Router Vacuum Cleaner Bag for Hercules (5x) Filter for Hercules	

Order codes: Hardware										
F1612-31	Media Handli	ng Add-Ons								
500-9120 500-9121 500-9122 500-9140	Basket Extension Table Roll-up Conveyor Extension Front									
F1832-31, F32XX-31	Media Handling Add-On									
500-9412 500-9410	Heavy Duty Roll S Heavy Duty Roll S									
F1432-31, F3220-31	F1832-31, F3232-31	Miscellaneous Options								
500-9165 500-9166	500-9155 500-9156	Kit Pump Connection 12m Kit Pump Connection 25m								
All F Series	Modules									
500-9300 500-9310 500-9310 500-9330 500-9357 500-9354 500-9363 500-9362 500-9372 500-9371 500-9373 500-9374	Drag Module Tangential Module High Torque Rotary Module Routing System (F1612) Routing System (F1330) Routing System (F1832) Routing System (F3220) Routing System (F3232) HF Routing System (F1612) HF Routing System (F1612) HF Routing System (F1830) HF Routing System (F1832) HF Routing System (F3220) HF Routing System (F3220) HF Routing System (F3232)									
All F Series	Tools for Tang	gential Module								
500-9311 500-9312 500-9313 500-9314 500-9324 500-9325 500-9327 500-9328 500-9329 500-9340 500-9341 500-9342 500-9343 500-9344 500-9320 500-9350 500-9358	Kiss Cutting Tool Single Edge Cutout Tool Double Edge Cutout Tool Heavy-Duty Cutout Tool Creasing Tool D50 R1.5 Creasing Tool D25 R3 W8 H7 Creasing Tool D25 R1.5 W8 H5.5 Creasing Tool D25 R0.75 W1.5 H1.5 Creasing Tool D15 2pt Creasing Tool D15 2pt Creasing Tool D15 1pt V-Cut Tool - 0° V-Cut Tool - 15° V-Cut Tool - 30° V-Cut Tool - 45° Electronic Oscillating Tool Pneumatic Oscillating Tool									
All F Series	Mats And Bel	ts								
500-9114 500-9115 500-9333 500-9163 500-9164 500-9356 500-9356 500-9333 500-9181 500-9182 500-9333	Conveyor Belt Kit (F1612) Protective Mat (F1612) Routing Mat (F1612) Conveyor Belt Kit (F1330) Protective Mats (2x) (F1330) Routing Mat (F1330) Conveyor Belt Kit (F1832) Protective Mat (2x) (F1832) Routing Mat (F1832) Conveyor Belt Kit (F3232) Conveyor Belt Kit (F3220) Routing Mat (F3232 / F3220) Note: Routing Mat for the F3232 / F3220 has to be ordered twice!									
All F Series	Automated Do	•								
500-9126 500-9130 500-9135 500-9136	Field Upgrade: ALC *Requires: ADC Ri Field Upgrade:AD *Requires: ADC Ri Upgrade:ADC Lef *Requires: ADC Ri Upgrade:ADC Lef *Requires: ADC Ri	ght C Left (F1330)* ght Field t (F1832/F3232)* ght t (F3220)*								
All F Series	Accessories									
500-9347 500-9348 500-9349 500-9332 500-9202	Filter for Hercules Carbon Filter for I	Hercules Bag for 500–9331 (5x) r Pack								

Please contact your dealer for the complete list

All F Series S	ystems
500-9520	F-Performance Mode (units build before 2018)
500-9511 500-9513	Summa GoProduce™ - Upgrade Summa GoProduce™-Pro Pack
500-9515 500-9516	Summa GoProduce™ - Update Summa GoProduce™ - Lifetime updates
Please contact your	dealer for more information

Order codes: Software

NOTES

F SERIES™



Professional flatbed finishing systems

Summa nv Rochesterlaan 6 8470 Gistel Belgium

www.Summa.com

Summa America 100 Cummings Center Suite #151-G Beverly MA 01915 USA

Follow us on LinkedIn | Facebook | Twitter | YouTube | #SummaFinish

Copyright 2020@ Summa nv. Marketing Communications. Summa nv believes that all illustrations and specifications contained in this catalogue are correct at the time of publication. Summa nv reserves the right to make changes at any time, without notice. RevEN20.12 / All rights reserved

